



Digital Migration Radio MD61X

- > Analog & Digital Dual Modes
- > Clear Voice
- > Remote Control Head
- > GPS and Bluetooth Option





PROFESSIONAL AND SIMPLE TO USE



A&D Auto Detect

Compatible with analog conventional and digital conventional modes. Allow MD61X to simultaneously monitor analog and digital modes and automatically respond in each mode. It is an easy way for migration to digital from analog.



ENLARGE TALKING RANGE

With a high RF power output up to 50W, MD61X can dramatically enlarge your communication range.



GPS POSITIONING (Optional)

With an external GPS module and GPS antenna, MD61X can upload its real-time position to AVL applications.



REMOTE CONTROL HEAD(Coming soon)

Remote control head kit reduces your concerns of installation, and offers you a flexible solution for various vehicle types.



ANALOG SIGNALING

Support DTMF and HDC1200(coming soon) signaling in analog mode.



DOUBLE CAPACITY IN DIRECT MODE

Based on the DMR TDMA technology, you can have two voice calls simultaneously in direct mode.



RELIABLE AND DURABLE

MD61X is compliant with MIL-STD-810 C/D/E/F/G and IP54.



PSEUDO TRUNK

Several talk groups share the same frequency, and each one of them can dynamically chose to use one of the slots to talk. This is a two-slot-trunked mode. While time-slot 1 is busy, MD61X will use time-slot 2 to transmit.



RADIO REGISTRATION SERVICE

RRS allows MD61X working in Smart Dispatch and SmartOne Dispatch, for online/offline presence.



SUPPLEMENTARY FEATURES (Optional)

MD61X supports radio Enable/Disable, Remoter Monitor and Priority Interrupt.



EMERGENCY ALARM/CALL

Use the orange emergency button to initiate an emergency alarm and call to other radios.



BUILT-IN BLUETOOTH (Factory Optional)

Built-in Bluetooth supports MD61X to have wireless audio accessories and external PTT device connected.



PRIVACY

Basic end-to-end Encryption secures your voice and data transmission.



ROAMING (Optional)

It allows MD61X to be used in a large multi-site network.

TARGET MARKETS




Taxi



Agriculture



Truck

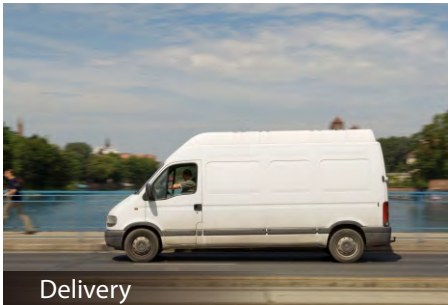

Delivery



School Bus




Ambulance

ACCESSORIES

Diverse accessories for specific tasks

STANDARD



Pictures above are for reference only and may vary from actual products.

SPECIFICATIONS

GENERAL			
Frequency Range	UHF: 400-470MHz; VHF: 136-174MHz		
Channel Capacity	48 (16 channels per zone)		
Zone Capacity	3		
Channel spacing	12.5 / 25 KHz		
Operating Voltage	13.6V ±15%		
Current Drain	Standby	around 0.3A	
	Receive	< 1 A	
	Transmit	1W	<3A
		25W	<8A
5W		<5A	
	45W	<12A	
Weight	1100g		
Dimensions	164 X 43 X 150 mm		
Frequency Stability	±0.5 ppm		
Antenna Impedance	50Ω		
RECEIVER			
Sensitivity	Analog	0.3μV (12dB SINAD); 0.22μV (Typical) (12dB SINAD); 0.4μV (20dB SINAD)	
	Digital	0.3μV /BER5%	
Selectivity	TIA-603	60dB @ 12.5KHz / 70dB @ 25KHz [#]	
	ETSI	60dB @ 12.5KHz / 70dB @ 25KHz [#]	
Intermodulation	TIA-603	70dB @ 12.5/25KHz [#]	
	ETSI	65dB @ 12.5/25KHz [#]	
Spurious Response Rejection	TIA-603	70dB @ 12.5/25KHz [#]	
	ETSI	70dB @ 12.5/25KHz	
Blocking	TIA-603	90dB	
	ETSI	84dB	
Hum and Noise	40dB @ 12.5KHz 45dB @ 25KHz [#]		
Rated Audio Power Output	Internal (@16 ohm load)	4W	
	External (@8 ohm load)	8W	
Max Audio Power Output	Internal (@16 ohm load)	6W	
	External (@8 ohm load)	12W	
Rated Audio Distortion	≤3%		
Audio Response	+1 ~ -3dB		
Conducted Spurious Emission	<-57dBm		

TRANSMITTER	
RF Power Output	Low power version: 1-25W (UHF/VHF) High power version: 5-45W(UHF) / 5-50W(VHF)
FM Modulation	11K0F3E @ 12.5KHz; 16K0F3E @ 25KHz [#]
4FSK Digital Modulation	12.5KHz Data Only: 7K60FXD 12.5KHz Data & Voice: 7K60FXW
Conducted/Radiated Emission	-36dBm<1GHz; -30dBm>1GHz
Modulation Limiting	±2.5KHz @ 12.5KHz ±5.0KHz @ 25KHz [#]
FM Hum & Noise	40dB @ 12.5KHz 45dB @ 25KHz [#]
Adjacent Channel Power	60dB @ 12.5KHz; 70dB @ 25KHz [#]
Audio Response	+1 ~ -3dB
Audio Distortion	≤3%
Digital Vocoder Type	AMBE++ or SELP
Digital Protocol	ETSI-TS102 361-1,-2,-3

ENVIRONMENTAL	
Operating Temperature	-30°C~ +60°C
Storage Temperature	-40°C~ +85°C
ESD	IEC 61000-4-2 (Level 4) ±8kV (Contact) ±15kV (Air)
American Military Standard	MIL-STD-810 G
Dustproof & Waterproof	IP54 Standard
Humidity	MIL-STD-810 G Standard
Shock & Vibration	MIL-STD-810 G Standard

[#]20KHz/25KHz will not be available on new equipment in the U.S. after 2011-01-01.

All specifications are subject to change without notice due to continuous development.

MD61X, X=0, 2, 5, 6 or 8, model number varies geographically. For details, please contact our regional sales representatives.



Hytera Communications Co.,Ltd. 日本総合窓口

〒101-0021 東京都千代田区外神田三丁目6番1号

TEL:03-3525-8199
https://www.hytera.jp



hytera.jp



Facebook



YouTube

販売代理店

*定格・仕様・外觀・規格は改良のために予告なく変更することがあります。製品の色は印刷の関係上、実際の色とは異なる場合があります。

ハイテラ, Hytera, Hytera CommunicationsおよびハイテラのロゴマークはHytera Communications Co.,Ltd.の商標登録です。©Hytera Communications Co.,Ltd.2017.All rights reserved.